

---

Master Agreement - E194 - 592 - 1 - New - Final

---

Document Id: 592

Title: 194-1211.1

Print Date: 7/18/2008

Procurement Folder: 30896

Procurement Type: IFB

Effective Begin Date: 9/1/2008

Expiration Date: 8/31/2009

Minimum Order Amount: \$0.00

Maximum Order Amount: \$0.00

On Behalf Of Name: Edwin M. Patterson

Phone: (804) 786-3897

Email: Edwin.Patterson@dgs.virginia.gov

Preparer Name: Edwin M. Patterson

Phone: (804) 786-3897

Email: Edwin.Patterson@dgs.virginia.gov

Description: Term Contract for Drinking Water  
Dispensers

Created By: epatters2

Modified By: epatters2

Created On: 2008-07-15

Modified On: 2008-07-15

Contact Information

Edwin M. Patterson

Phone: (804) 786-3897

Email: Edwin.Patterson@dgs.virginia.gov

---

**Renewal Periods**

---

Line Number	Renewal Period Length	Renewal Period Unit	Effective Date	Expiration Date	Notification Days (Prior to Expiration)	Attachments (Name - Desc)
1	1	Years	9/1/2009	8/31/2010	90	
2	1	Years	9/1/2010	8/31/2011	90	
3	1	Years	9/1/2011	8/31/2012	90	

4	1	Years	9/1/2012	8/31/2013	120	
---	---	-------	----------	-----------	-----	--

---

Authorized Departments

---

Line Number	Department	Spending Limit	No Limit	Active	Exclude this Dept.	Ordered Amount	Attachments (Name - Desc)
1	E194	\$0.00	Yes	Yes	No	\$0.00	

---

**Terms And Conditions**

---

**Section GEN**

**eVA REGISTRATION**

eVA BUSINESS-TO-GOVERNMENT VENDOR REGISTRATION: The eVA Internet electronic procurement solution, web site portal [www.eVA.virginia.gov](http://www.eVA.virginia.gov) streamlines and automates government purchasing activities in the Commonwealth. The eVA portal is the gateway for vendors to conduct business with state agencies and public bodies. All vendors desiring to provide goods and/or services to the Commonwealth shall participate in the eVA Internet e-procurement solution either through the eVA Basic Vendor Registration Service or eVA Premium Vendor Registration Service. All bidders or offerors must register in eVA; failure to register will result in the bid/proposal being rejected.

- a.) eVA Basic Vendor Registration Service: \$25 Annual Fee plus the appropriate order Transaction Fee specified below. eVA Basic Vendor Registration Service includes electronic order receipt, vendor catalog posting, on-line registration, electronic bidding and the ability to research historical procurement data available in the eVA purchase transaction data warehouse. b.) eVA Premium Vendor Registration Service: \$25 Annual Fee plus the appropriate Transaction Fee specified below. eVA Premium Vendor Registration Service includes all benefits of the eVA Basic Vendor Registration Service plus automatic email or fax notification of solicitations and amendments. c.) For orders issued prior to August 16, 2006 the Vendor Transaction Fee is 1% capped at a maximum of \$500 per order. d.) For orders issued August 16, 2006 and after, the Vendor Transaction Fee is: (i) DMBE-certified Small Businesses: 1% capped at \$500 per order. (ii) Businesses that are not DMBE-certified Small Businesses: 1% capped at \$1,500 per order.

**Section SPC**

**PRICE ESCALATION**

PRICE ESCALATION/DE-ESCALATION: Price adjustments may be permitted for changes in the contractor's cost of materials not to exceed the increase in the following index/indices: PPI, Producers Price Index. No price increases will be authorized for 180 calendar days after the effective date of the contract. Price escalation may be permitted only at the end of this period and each 180 days thereafter and only where verified to the satisfaction of the purchasing office. However, "across the board" price decreases are subject to implementation at any time and shall be immediately conveyed to the Commonwealth. Contractor shall give not less than 30 days advance notice of any price increase to the purchasing office. Any approved price changes will be effective only at the beginning of the calendar month following the end of the full 30 day notification period. (continued in part 2)

The contractor shall document the amount and proposed effective date of any general change in the price of materials. Documentation shall be supplied with the contractor's request for increase which will: (1) verify that the requested price increase is general in scope and not applicable just to the

Commonwealth of Virginia; and (2) verify the amount or percentage of increase which is being passed on to the contractor by the contractor's suppliers. The purchasing office will notify the using agencies and contractor in writing of the effective date of any increase which it approves. However, the contractor shall fill all purchase orders received prior to the effective date of the price adjustment at the old contract prices. The contractor is further advised that decreases which affect the cost of materials are required to be communicated immediately to the purchasing office.

## **QUANTITIES**

QUANTITIES: Quantities set forth in this solicitation are estimates only, and the contractor shall supply at bid prices actual quantities as ordered, regardless of whether such total quantities are more or less than those shown.

## **RENEWAL OF CONTRACT**

RENEWAL OF CONTRACT: This contract may be renewed by the Commonwealth for (Four) 4 successive one year periods) under the terms and conditions of the original contract except as stated in 1. and 2. below. Price increases may be negotiated every 180 Days. Written notice of the Commonwealth's intention to renew shall be given approximately 90 days prior to the expiration date of each contract period. 1. If the Commonwealth elects to exercise the option to renew the contract for an additional one-year period, the contract price(s) for the additional one year shall not exceed the contract price(s) of the original contract increased/decreased by more than the percentage increase/decrease of the: PPI, Producers Price Index, category of the CPI-W section of the Consumer Price Index of the United States Bureau of Labor Statistics for the latest twelve months for which statistics are available. 2. If during any subsequent renewal periods, the Commonwealth elects to exercise the option to renew the contract, the contract price(s) for the subsequent renewal period shall not exceed the contract price(s) of the previous renewal period increased/decreased by more than the percentage increase/decrease of the category of the CPI-W section of the Consumer Price Index of the United States Bureau of Labor Statistics for the latest twelve months for which statistics are available.

## **WARRANTY**

WARRANTY: All materials and equipment shall be fully guaranteed against defects in material and workmanship for a period of one year following date of delivery. Should any defect be noted by the owner, the Purchasing Office will notify the contractor of such defect or non-conformance. Notification will state either (1) that the contractor shall replace or correct, or (2) the owner does not require replacement or correction, but an equitable adjustment to the contract price will be negotiated. If the contractor is required to correct or replace, it shall be at no cost to the Commonwealth and shall be subject to all provisions of this clause to the same extent as materials initially delivered. If the contractor fails or refuses to replace or correct the deficiency, the office issuing the purchase order may have the materials corrected or replaced with similar items and charge the contractor the costs occasioned thereby or obtain an equitable adjustment in the contract price.

---

## **SWAM Vendor**

---

Legal Name: VAMAC, INC.

Contact Name: Betty Clary

Location Legal Name: VAMAC  
4201JACQUE ST.  
RICHMOND, VA 23230

Contact Email: bclary@vamac.com

Contact Phone: 804-732-8854

Vendor Type: Primary

MA Number: E194 - 592

DUN Number: 008956732

---

**Lines**

---

Line: 1

Line Type: Item

NIGP Code: 22530

Description: Drinking water dispenser, bubbler type, free standing, style A, class 1, five gal. Size 5, min 4.5 gal/hr, Compressor, HP 1/5, 115V60 Hz, Single Phase. ELKAY MODEL FD 7005T1Z

Unit Price: \$275.68/Each

Free On Board Name: FOB Destination-Freight Prepaid

Model: FD7005L1Z

Color: GRAY

Warranty Type: 1 Year Full Warranty – Parts and Labor

Detailed Instructions: 1 COOLER FFA

---

Line: 2

Line Type: Item

NIGP Code: 22530

Description: Glass Filler ELKAY LK-1110

Unit Price: \$31.50/Each

Free On Board Name: FOB Destination-Freight Prepaid

Model: LK-1110

Warranty Type: 1 Year Full Warranty - Parts and Labor

---

Line: 3

Line Type: Item

NIGP Code: 22530

Description: Drinking water dispenser, bubbler type, free standing, style A, class 1, Fourteen gal. size 14, with min 13.5 gal/hr. draw off, Compressor HP 1/5, 115V60Hz single phase, ELKAY MODEL EFA 14L1Z

Unit Price: \$364.00/Each

Free On Board Name: FOB Destination-Freight Prepaid

Model: EFA14L1Z

Color: GRAY

Warranty Type: 1 Year Full Warranty - Parts and Labor

---

Line: 4

Line Type: Item

NIGP Code: 22530

Description: Glass Filler for the above item.  
ELKAY MODEL LK-1110

Unit Price: \$31.50/Each

Free On Board Name: FOB Destination-Freight Prepaid

Model: LK-1110

Warranty Type: 1 Year Full Warranty - Parts and Labor

---

Line: 5

Line Type: Item

NIGP Code: 22530

Description: Drinking water dispenser, bubbler type, wall mount, style B, class 1, fourteen gal. size 14 with min 13.5 gal/hr. draw off. compressor. HP 1/5, 115V/60 Hz, single phase, ELKAY MODEL EWA 14L1Z

Unit Price: \$346.50/Each

Free On Board Name: FOB Destination-Freight Prepaid

Model: EWA14L1Z

Color: GRAY

Warranty Type: 1 Year Full Warranty - Parts and Labor

---

Line: 6

Line Type: Item

NIGP Code: 22530

Description: Glass filler for above dispenser .  
ELKAY MODEL LK-1110

Unit Price: \$31.50/Each

Free On Board Name: FOB Destination-Freight Prepaid

Model: LK1110

Warranty Type: 1 Year Full Warranty - Parts and Labor

Detailed Instructions: 1 ITEM FFA

---

Line: 7

Line Type: Item

NIGP Code: 22530

Description: Drinking water dispenser, Hot & Cold, bubbler type, free standing, style A, class 1, Fourteen gal. size 14, min 13.5 gal/hr, draw off. Compressor HP 1/5, 115V60 Hz, single phase. ELKAY MODEL EFHA8L1Z

Unit Price: \$595.50/Each

Free On Board Name: FOB Destination-Freight Prepaid

Model: EFHA8L1Z

Size:

Color: GRAY

Warranty Type: 1 Year Full Warranty - Parts and Labor

Detailed Instructions: 1 COOLER FFA

---

Line: 8

Line Type: Item

NIGP Code: 22530

Description: Glass Filler for above dispenser . ELKAY MODEL LK-1110

Unit Price: \$31.50/Each

Free On Board Name: FOB Destination-Freight Prepaid

Model: LK1110

Warranty Type: 1 Year Full Warranty - Parts and Labor

Detailed Instructions: 1 ITEM FFA

---

Line: 9

Line Type: Item

NIGP Code: 22530

Description: Drinking water dispenser, bubbler type, Class 1, Wall mount, seven to eight gal, size 7, Wheel Chair level with min 7 gal/hr. draw off, Compressor HP 1/5, 115V60 Hz, single phase. ELKAY MODEL EZS8L

Unit Price: \$301.00/Each

Free On Board Name: FOB Destination-Freight Prepaid

Model: EZS8L-EZS8

Color: GRAY

Warranty Type: 1 Year Full Warranty - Parts  
and Labor

Detailed Instructions: 1 COOLER FFA

---

Line: 10

Line Type: Item

NIGP Code: 22530

Description: Glass filler for above dispenser.  
ELKAY MODEL LK-1110

Unit Price: \$31.50/Each

Free On Board Name: FOB Destination-Freight  
Prepaid

Shipping Method: Vendor

Model: LK1110

Warranty Type: 1 Year Full Warranty - Parts  
and Labor

Detailed Instructions: 1 ITEM FFA

# ELKAY<sup>®</sup>



## SPECIFICATIONS

### Push Lever Glass Filler Model LK1110

#### GENERAL


K1110 stainless steel single water gooseneck glass filler, manufactured with 100% lead-free material, plastic push lever control, 8-1/4" (210mm) high overall, 3/8" NPT connection. Ship. Wt. 1 lb.

#### DIMENSIONS

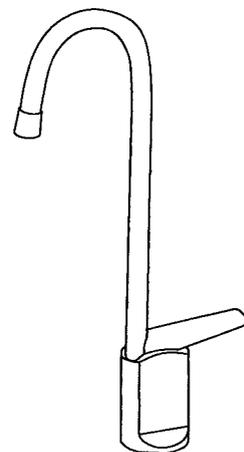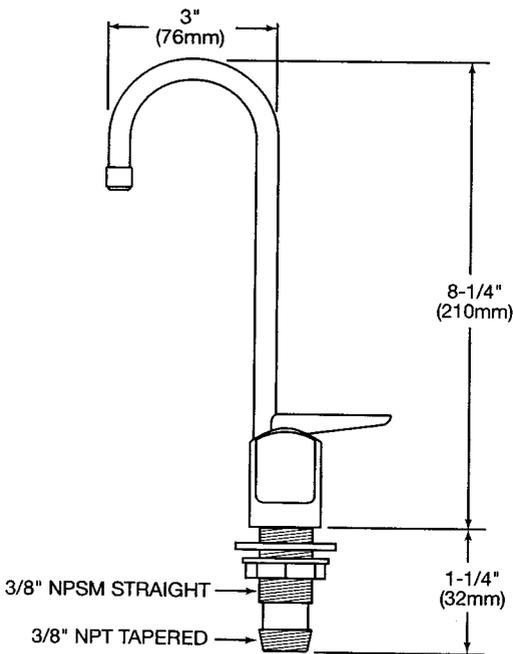


Model LK1110

#### PARTS LIST

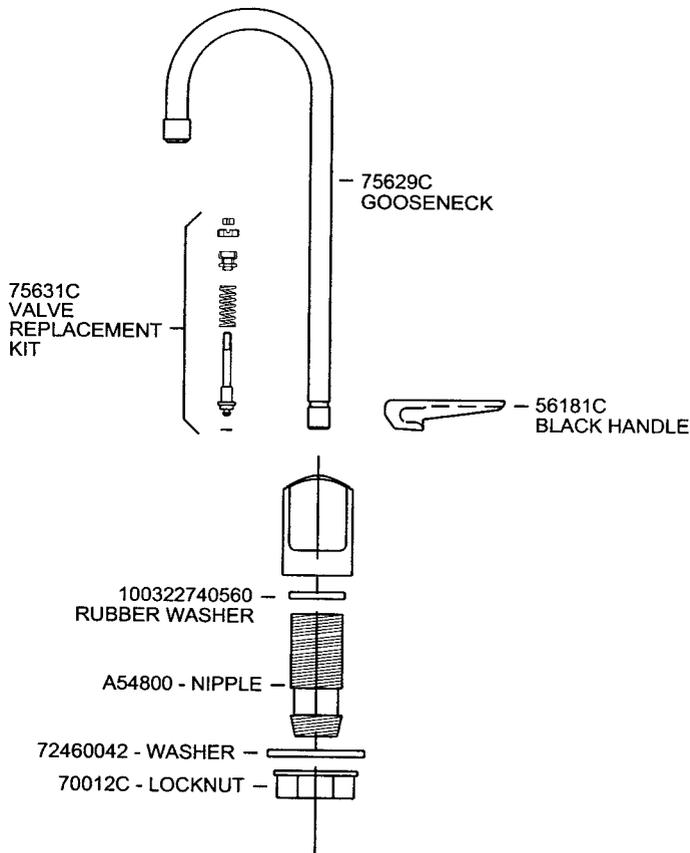

*In keeping with our policy of continuing product improvement, Elkay reserves the right to change product specifications without notice.*

*This specification describes an Elkay product with design, quality and functional benefits to the user. When making a comparison of other producers' offerings, be certain these features are not overlooked.*

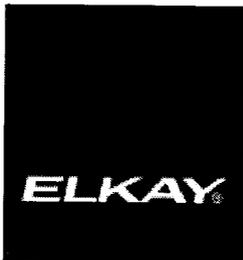

Discover the professional's choice.™

residential | commercial | where to buy | lk1110


style option results... Glass Filler | LK1110

\* Sugg

Print this page | Email to a friend | Where to buy

product details

techn

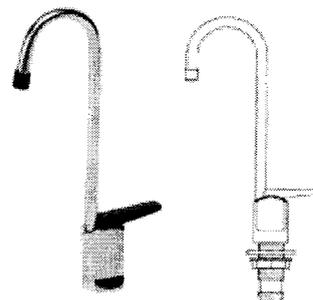

Accessory Type: Glass Fil  
 Material: Stainless  
 Finish: Chrome  
 Overall Height: 8 1/4"  
 Spout Reach: 3"  
 Shipping Weight: 1 lbs.  
 Price: \$177\*

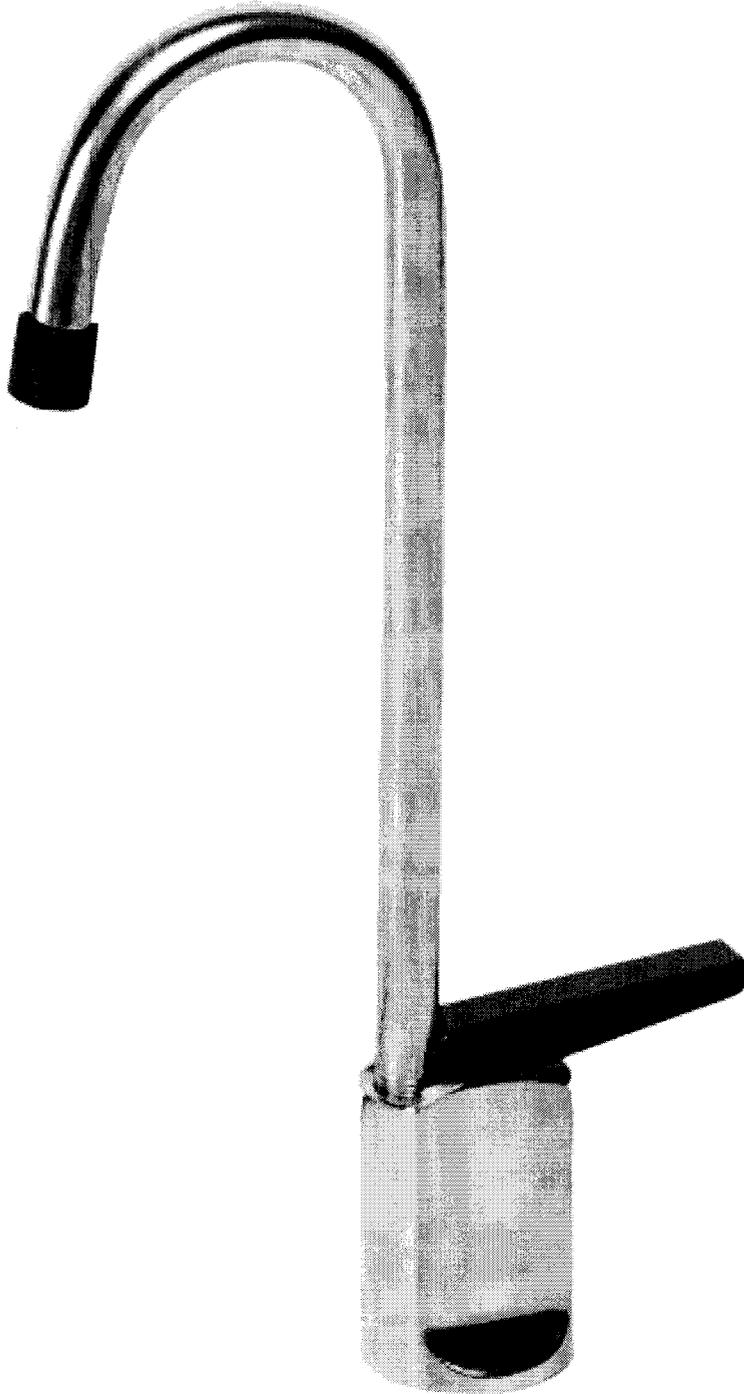


Image May Not Reflect Selected Options

[news + events](#) | [home](#) | [experience elkay](#) | [about us](#) | [contact us](#) | [tel. 630.572.3192](#) | [privacy policy](#) | [terms of use](#) | [site map](#)

© 200

# ELKAY® SPECIFICATIONS

## No Lead Space-ette® Floor-Mounted and Flush to Wall Water Cooler Models FD7003, FD7005 and FD70010

### GENERAL

Self-contained, electric refrigerated floor model water cooler. Capacity of 50°F drinking water, based upon 80°F inlet water and 90°F ambient.

This model furnished with hermetically sealed combination tank-tube type cooling unit enclosed in cabinet. Cabinet design allows for flush to wall installation. Removable front panel and cabinet sides are Sandal-wood Vinyl.

Non-pressurized tank system is standard. Non-pressurized water tank is located after bubbler valve, so that tank is subject to line pressure only when valve button is pressed.

### NO LEAD DESIGN

**THIS WATER COOLER COMPLIES WITH THE LEAD-FREE DEFINITION IN THE SAFE DRINKING WATER ACT OF 1986 AND LEAD CONTAMINATION CONTROL ACT OF 1988.**

Elkay Water Coolers are manufactured with a waterway system utilizing copper components and completely lead-free material. These waterways have no lead because all lead materials, such as leaded brass, have been removed. All joints are brazed using silver solder only. No lead solder is permitted. A strainer with an easily cleanable screen is provided to allow trapping and convenient removal of water born particulate of 140 microns and larger prior to their entry into the water cooler.

This water cooler is certified to NSF/ANSI 61.

### CAPACITIES CHART

Model Number	Base Rate	**GPH of 50°F Drinking Water			Rated Watts	Full Load Amps	Glass Filler Option	Ship. Wt. Lbs.
		Room Temperature °F						
		70°F	80°F	90°F				
FD7003	3.0	3.6	3.3	3.0	230	2.5	Yes	54
FD7005	5.0	6.1	5.5	5.0	230	2.5	Yes	60
FD70010	9.8	11.9	10.8	9.8	535	5.8	Yes	69

\*\*Based on 80°F inlet water temperature.

†Glass filler available at extra cost. Requires factory preparation to receive glass filler.

Rated watts shown are based on operational (run) time, in compliance with ARI Standard 1010 conditions. Specific applications will determine the actual watts consumed per hour. Watts consumed will be based on number of people served per hour (usage), ambient temperatures, and inlet water temperature.

### COOLING SYSTEM


**Motor Compressor:** Hermetically sealed, reciprocating type, 115V, 60 Hertz single phase. Sealed-in lifetime oil supply. Equipped with electric cord and three prong molded rubber plug.

**Condenser:** Fan cooled, copper tube with aluminum fins. Fan motor is permanently lubricated.

**Cooling Unit:** Combination tube-tank type. Tube portion is continuous coil of copper tubing. Fully insulated with EPS foam which meets Underwriters Laboratories Inc. requirements for self extinguishing material.

**Refrigerant Control:** Refrigerant HFC-134a is controlled by accurately calibrated capillary tube for positively trouble free performance.

**Temperature Control:** Enclosed adjustable thermostat is factory pre-set. Requires no adjustment other than for altitude requirements.

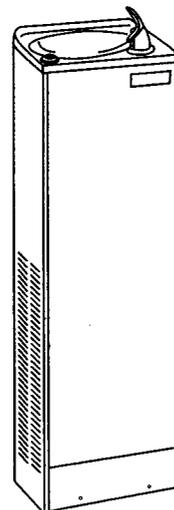

Model FD7005

### CONSTRUCTION

**Cabinet:** Cabinet wrapper supports fountain top and all working mechanisms. Removable front panel and cabinet sides are Sandalwood vinyl. Stainless Steel cabinet available at extra cost.

**Fountain Top:** One piece stainless steel top, polished to a uniform Elkay bright luster finish. Unique Swirl-Flo basin has an integral vandal-resistant strainer, embossed bubbler pad.

**Exclusive Flexi-Guard® Safety Bubbler\*:** Innovative design utilizes an infused anti-microbial pliable polyester elastomer to prevent accidental mouth injuries. Flexes on impact, then returns to original position. Strong. Abrasion-resistant. Anti-sweat. Keyed in location to prevent rotation.

**5 YEAR LIMITED WARRANTY** on the refrigeration system of the unit. Electrical components and water system are warranted for 12 months from date of installation. Sample Certificate available on request.

Elkay Pressure-Type Water Coolers are designed to operate on 20 psi to 105 psi supply line pressure. If inlet pressure is above 105 psi, a pressure regulator must be installed in the supply line. Any damage caused by reason of connecting this product to supply line pressures lower than 20 psi or higher than 105 psi is not covered by the warranty.

### STANDARDS

**UL** Elkay Electric Air Cooled Water Coolers meet the requirements of NSF/ANSI 61. Unit complies with A.R.I. Standard 1010.


\* Patent #4,481,971

*This specification describes an Elkay product with design, quality and functional benefits to the user. When making a comparison of other producers' offerings, be certain these features are not overlooked.*


*In keeping with our policy of continuing product improvement, Elkay reserves the right to change product specifications without notice.*

**No Lead Space-ette®  
Floor-Mounted and Flush to Wall Water Cooler  
Models FD7003, FD7005 and FD70010**

**ELKAY®  
ROUGH-IN DIMENSIONS**

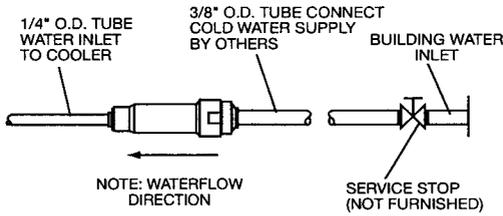

**OPERATION OF QUICK CONNECT FITTINGS**

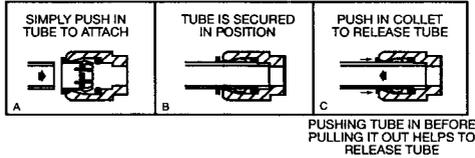


**IMPORTANT!  
INSTALLER PLEASE NOTE:**


This water cooler has been designed and built to provide water to the user which has not been altered by materials in the cooler waterways. The grounding of electrical equipment such as telephone, computers, etc., to water lines is a common procedure. This grounding may be in the building but may also occur away from the building. This grounding can cause electrical feedback into a water cooler creating an electrolysis which creates a metallic taste or causes an increase in the metal content of the water. This condition is avoidable by installing the cooler using the proper materials as shown below.

**NOTICE**


This water cooler must be connected to the water supply using a dielectric coupling. The cooler is furnished with a non-metallic strainer which meets this requirement. The drain trap which is provided by the installer should also be plastic to completely isolate the cooler from the building plumbing system.

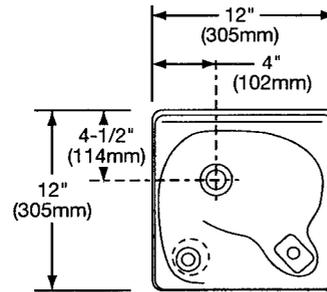

**TOP VIEW**

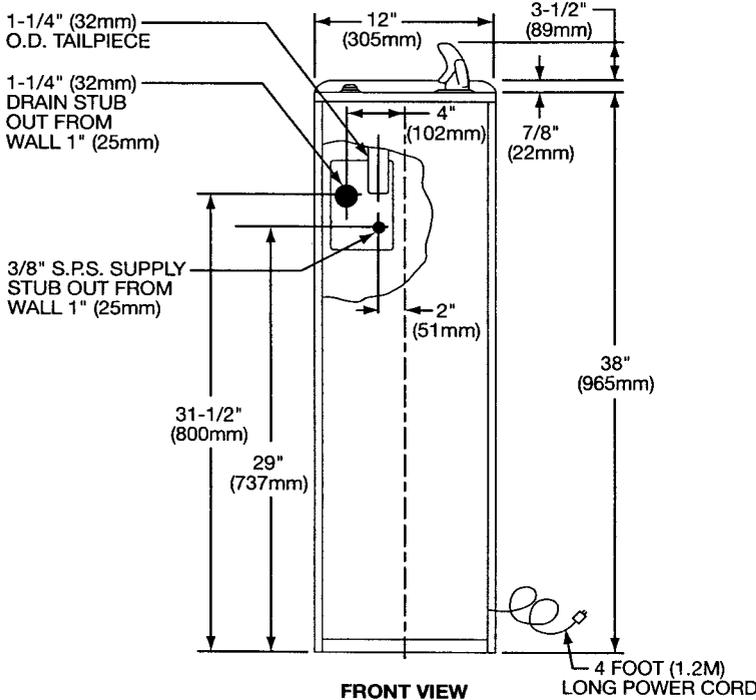

**FRONT VIEW**

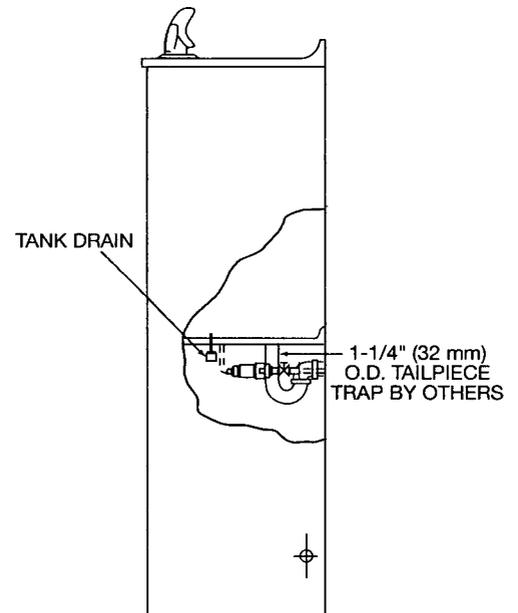

**SIDE VIEW**

# ELKAY<sup>®</sup>

## SPECIFICATIONS

### No Lead Floor Model Water Cooler Air Cooled Models EFA4, EFA8, EFA14, EFA16 and EFA20

#### GENERAL

Self-contained, electric refrigerated, floor model water cooler. Capacity of 50°F drinking water, based upon 80°F inlet water and 90°F ambient.

Non-pressurized tank system is standard. Non-pressurized water tank is located after bubbler valve, so that tank is subject to line pressure only when valve button is pressed.

#### NO LEAD DESIGN

#### THIS WATER COOLER COMPLIES WITH THE LEAD-FREE DEFINITION IN THE SAFE DRINKING WATER ACT OF 1986 AND LEAD CONTAMINATION CONTROL ACT OF 1988.

Elkay Water Coolers are manufactured with a waterway system utilizing copper components and completely lead-free materials. These waterways have no lead because all lead materials, such as leaded brass, have been removed. All joints are brazed using silver solder only. No lead solder is permitted. A strainer with an easily cleanable screen is provided to allow trapping and convenient removal of water born particulate of 140 microns and larger prior to their entry into the water cooler.

These water coolers are certified to NSF/ANSI 61.

#### CAPACITIES CHART

Model Number	Base Rate	*GPH of 50°F Drinking Water			Rated Watts	Full Load Amps	Glass Filler Option	*Pre-Cooler	Ship. Wt. Lbs.
		Room Temperature °F							
		70°F	80°F	90°F					
EFA4	4.0	4.8	4.4	4.0	230	2.5	Yes	No	78
EFA8	7.6	9.2	8.4	7.6	370	4.0	Yes	No	81
EFA14	13.5	16.3	14.9	13.5	665	7.2	Yes	No	84
†EFA16	9.6	18.8	17.1	15.5	510	5.5	Yes	Yes	87
†EFA20	12.0	23.6	21.5	19.5	665	7.2	Yes	Yes	87

\*Based on 80°F inlet water temperature.

•Pre-cooler capacities based on 60% spill through pre-cooler.

†Glass filler available at extra cost. Require factory preparation to receive glass filler.

†EFA16 and EFA20 meet only the lead-free definition of NSF/ANSI 61.

Rated watts shown are based on operational (run) time, in compliance with A.R.I. Standard 1010 conditions. Specific applications will determine the actual watts consumed per hour. Watts consumed will be based on number of people served per hour (usage), ambient temperatures, and inlet water temperature.

Foot pedal available. Factory installed only.

#### COOLING SYSTEM


**Motor Compressor:** Hermetically sealed, reciprocating type, 115V, 60 Hertz single phase. Sealed-in lifetime oil supply. Equipped with electric cord and three prong molded rubber plug.

**Condenser:** Fan cooled, copper tube with aluminum fins. (EFA4 has steel tube with steel fins.) Fan motor is permanently lubricated.

**Cooling Unit:** Combination tube-tank type. Tube portion is continuous coil of copper tubing. Fully insulated with EPS foam which meets Underwriters Laboratories Inc. requirements for self extinguishing material.

**Refrigerant Control:** Refrigerant type HFC-134a is controlled by accurately calibrated capillary tube for positively trouble-free performance.

**Temperature Control:** Enclosed adjustable thermostat is factory preset. Requires no adjustment other than for altitude requirements.

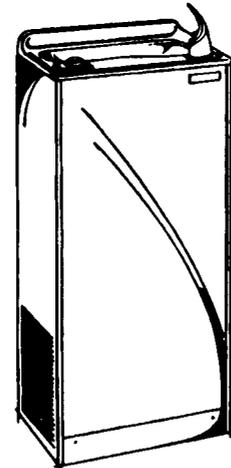

Model EFA4

#### CONSTRUCTION

**Fountain Top:** One piece stainless steel top, polished to a uniform Elkay bright luster finish. Exclusive Cascade basin, tested most splash-resistant, features multi-level deck design with a built-in vandal-resistant strainer.

**Exclusive Flexi-Guard® Safety Bubbler\*\*:** Innovative design utilizes a pliable polyester elastomer to prevent accidental mouth injuries. Flexes on impact, then returns to original position. Strong. Abrasion-resistant. Anti-sweat. Meets UL requirements and all sanitary codes.

**Removable Panel:** Removable front panel offers easy accessibility to interior.

**Color Selection:** Gray Beige vinyl furnished as standard unless alternate panel color is selected. Alternate panel colors in vinyl are: Granite, Sandalwood, and Natural Almond. All furnished at no extra cost. Stainless steel available at extra cost.

**Cabinet:** Cabinet design allows for flush to wall mounting or free standing.

**5 YEAR LIMITED WARRANTY** on the refrigeration system of the unit. Electrical components and water system are warranted for 12 months from date of installation. Sample Certificate available on request.

Elkay Pressure-Type Water Coolers are designed to operate on 20 psi to 105 psi supply line pressure. If inlet pressure is above 105 psi, a pressure regulator must be installed in the supply line. Any damage caused by reason of connecting this product to supply line pressures lower than 20 psi or higher than 105 psi is not covered by the warranty.

#### STANDARDS



Elkay Electric Air Cooled Water Coolers meet the requirements of NSF/ANSI 61. Unit complies with A.R.I. Standard 1010.

\*\*Patent #4,481,971

In keeping with our policy of continuing product improvement, Elkay reserves the right to change product specifications without notice.

This specification describes an Elkay product with design, quality and functional benefits to the user. When making a comparison of other producers' offerings, be certain these features are not overlooked.

Elkay  
elkay.com


2222 Camden Court  
Oak Brook, IL 60523

Printed in U.S.A.  
©2006 Elkay


(Rev. 9/06) 9-2G

**No Lead Floor Model Water Cooler  
Air Cooled  
Models EFA4, EFA8, EFA14, EFA16 and EFA20**

**ELKAY®  
ROUGH-IN DIMENSIONS**

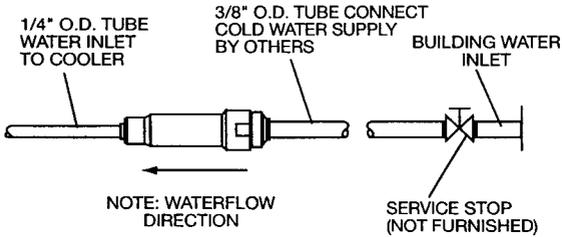

**OPERATION OF QUICK CONNECT FITTINGS**

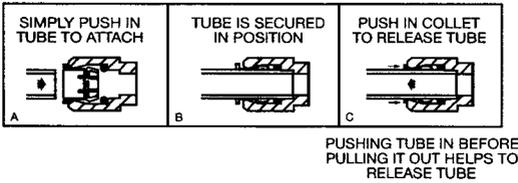

**IMPORTANT!  
INSTALLER PLEASE NOTE:**


This water cooler has been designed and built to provide water to the user which has not been altered by materials in the cooler waterways.

The grounding of electrical equipment such as telephone, computers, etc., to water lines is a common procedure. This grounding may be in the building but may also occur away from the building. This grounding can cause electrical feedback into a water cooler creating an electrolysis which creates a metallic taste or causes an increase in the metal content of the water. This condition is avoidable by installing the cooler using the proper materials as shown below.

**NOTICE**

This water cooler must be connected to the water supply using a dielectric coupling. The cooler is furnished with a non-metallic strainer which meets this requirement.

The drain trap which is provided by the installer should also be plastic to completely isolate the cooler from the building plumbing system.

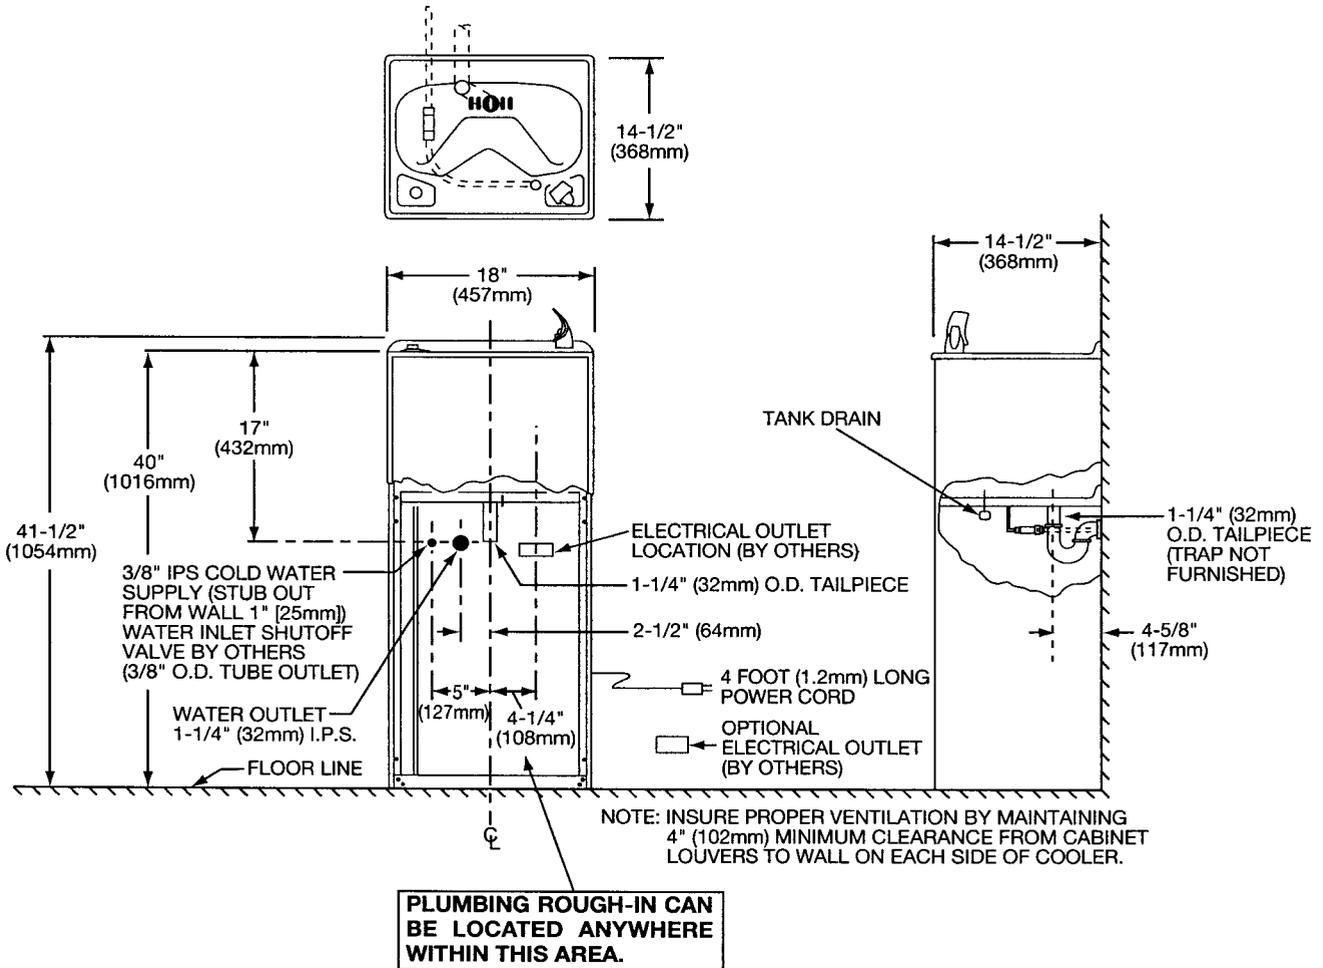

# ELKAY®

## SPECIFICATIONS

### No Lead Wall Mount Water Cooler Air Cooled – Models EWA4, EWA8, EWA14, EWA16 and EWA20

#### GENERAL

Self-contained, electric refrigerated, wall hung water cooler. Capacity of 50°F drinking water, based upon 80°F inlet water and 90°F ambient.

Non-pressurized tank system is standard. Non-pressurized water tank is located after bubbler valve, so that tank is subject to line pressure only when valve button is pressed.

#### NO LEAD DESIGN

**THIS WATER COOLER COMPLIES WITH THE LEAD-FREE DEFINITION IN THE SAFE DRINKING WATER ACT OF 1986 AND LEAD CONTAMINATION CONTROL ACT OF 1988.**

Elkay Water Coolers are manufactured with a waterway system utilizing copper components and completely lead-free materials. These waterways have no lead because all lead materials, such as leaded brass, have been removed. All joints are brazed using silver solder only. No lead solder is permitted. A strainer with an easily cleanable screen is provided to allow trapping and convenient removal of waterborne particulate of 140 microns and larger prior to their entry into the water cooler.

These water coolers are certified to **NSF/ANSI 61**.

#### CAPACITIES CHART

Model Number	Base Rate	*GPH of 50°F Drinking Water			Rated Watts	Full Load Amps	Glass† Filler Option	•Pre-Cooler	Ship. Wt. Lbs.
		Room Temperature °F							
		70°F	80°F	90°F					
EWA4	4.0	4.8	4.4	4.0	230	2.5	Yes	No	66
EWA8	7.6	9.2	8.4	7.6	370	4.0	Yes	No	69
EWA14	13.5	16.3	14.9	13.5	665	7.2	Yes	No	72
†EWA16	9.6	18.8	17.1	15.5	510	5.5	Yes	Yes	76
††EWA20	12.0	23.6	21.5	19.5	665	7.2	Yes	Yes	74

\*Based on 80°F inlet water temperature.

•Pre-cooler capacities based on 60% spill through pre-cooler.

†Glass filler available at extra cost. Requires factory preparation to receive glass filler.

††EWA16 and EWA20 meet only the lead-free definition of NSF/ANSI 61.

Rated watts shown are based on operational (run) time, in compliance with A.R.I. Standard 1010 conditions. Specific applications will determine the actual watts consumed per hour. Watts consumed will be based on number of people served per hour (usage), ambient temperatures, and inlet water temperature.

#### COOLING SYSTEM


**Motor Compressor:** Hermetically sealed, reciprocating type, 115V, 60 Hz single phase. Sealed-in lifetime oil supply. Equipped with electric cord and three prong molded rubber plug.

**Condenser:** Fan cooled, copper tube with aluminum fins. (EWA4 has steel tube with steel fins.) Fan motor is permanently lubricated.

**Cooling Unit:** Combination tube-tank type. Tube portion is continuous coil of copper tubing. Fully insulated with EPS foam which meets Underwriters Laboratories Inc. requirements for self extinguishing material.

**Refrigerant Control:** Refrigerant HFC-134a is controlled by accurately calibrated capillary tube for positively trouble-free performance.

**Temperature Control:** Enclosed adjustable thermostat is factory preset. Requires no adjustment other than for altitude requirement.

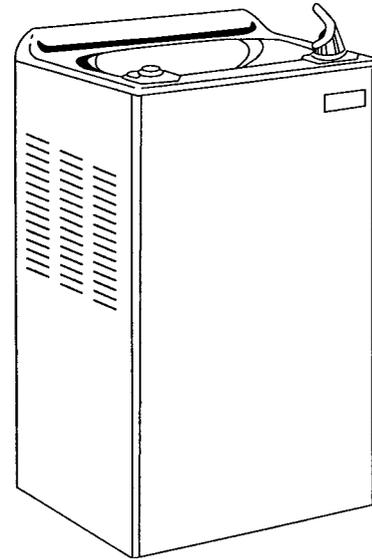

Model EWA4

#### CONSTRUCTION

**Fountain Top:** One piece stainless steel top, polished to a uniform Elkay bright luster finish. Exclusive Cascade basin tested most splash-resistant, features multi-level deck design with a built-in vandal-resistant strainer.

**Exclusive Flexi-Guard® Safety Bubbler\*\*:** Innovative design utilizes an infused anti-microbial pliable polyester elastomer to prevent accidental mouth injuries. Flexes on impact, then returns to original position. Strong. Abrasion-resistant. Anti-sweat. Keyed in location to prevent rotation.

**Removable Panel:** Removable front panel offers easy accessibility to interior. Cabinet design allows for flush to wall mounting.

**Color Selection:** Gray Beige vinyl furnished as standard unless alternate wrapper color is selected. Alternate wrapper colors in vinyl are: Granite, Sandalwood, and Natural Almond. All furnished at no extra cost. Stainless steel units available at extra cost.

**5 YEAR LIMITED WARRANTY** on the refrigeration system of the unit. Electrical components and water system are warranted for 12 months from date of installation. Sample Certificate available on request.

Elkay Pressure-Type Water Coolers are designed to operate on 20 psi to 105 psi supply line pressure. If inlet pressure is above 105 psi, a pressure regulator must be installed in the supply line. Any damage caused by reason of connecting this product to supply line pressures lower than 20 psi or higher than 105 psi is not covered by the warranty.

#### STANDARDS



Elkay Electric Air Cooled Water Coolers meet the requirements of NSF/ANSI 61. Unit complies with A.R.I. Standard 1010.

\*\*Patent #4,481,971

In keeping with our policy of continuing product improvement, Elkay reserves the right to change product specifications without notice.

This specification describes an Elkay product with design, quality and functional benefits to the user. When making a comparison of other producers' offerings, be certain these features are not overlooked.


Elkay  
elkayusa.com

2222 Camden Court  
Oak Brook, IL 60523


Printed in U.S.A.  
©2006 Elkay  
(Rev. 9/06) 10-8H

**No Lead Wall Mount Water Cooler  
Air Cooled - Models EWA4, EWA8,  
EWA14, EWA16 and EWA20**

**ELKAY®  
ROUGH-IN DIMENSIONS**

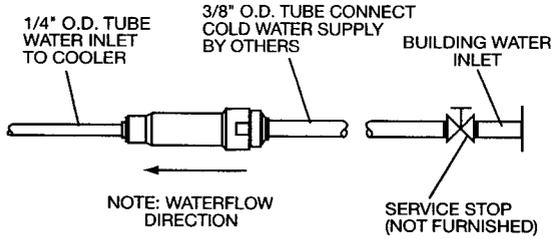

**OPERATION OF QUICK CONNECT FITTINGS**

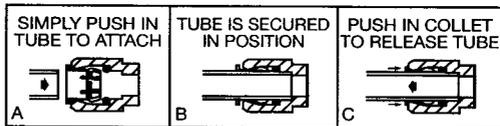

PUSHING TUBE IN BEFORE PULLING IT OUT HELPS TO RELEASE TUBE


**IMPORTANT!  
INSTALLER PLEASE NOTE:**

This water cooler has been designed and built to provide water to the user which has not been altered by materials in the cooler waterways. The grounding of electrical equipment such as telephone, computers, etc., to water lines is a common procedure. This grounding may be in the building but may also occur away from the building. This grounding can cause electrical feedback into a water cooler creating an electrolysis which creates a metallic taste or causes an increase in the metal content of the water. This condition is avoidable by installing the cooler using the proper materials as shown below.


**NOTICE**

This water cooler must be connected to the water supply using a dielectric coupling. The cooler is furnished with a non-metallic strainer which meets this requirement. The drain trap which is provided by the installer should also be plastic to completely isolate the cooler from the building plumbing system.


**TOP VIEW**

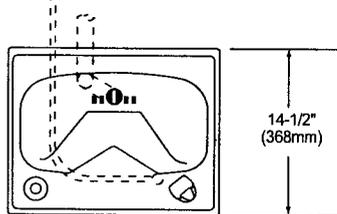


**FRONT VIEW**

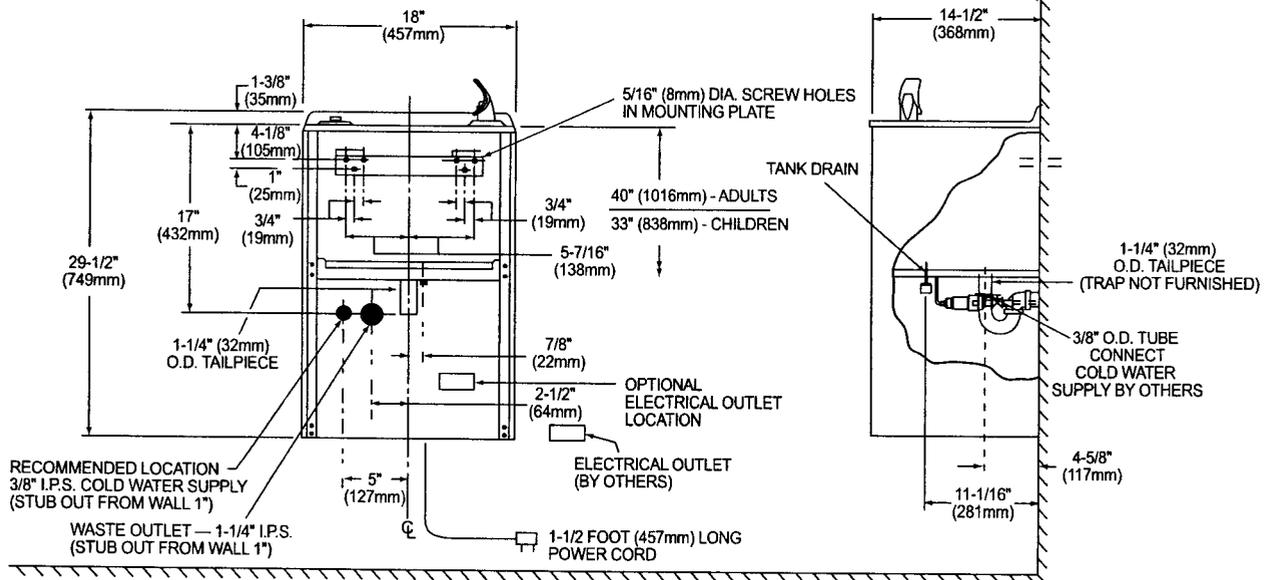

**SIDE VIEW**

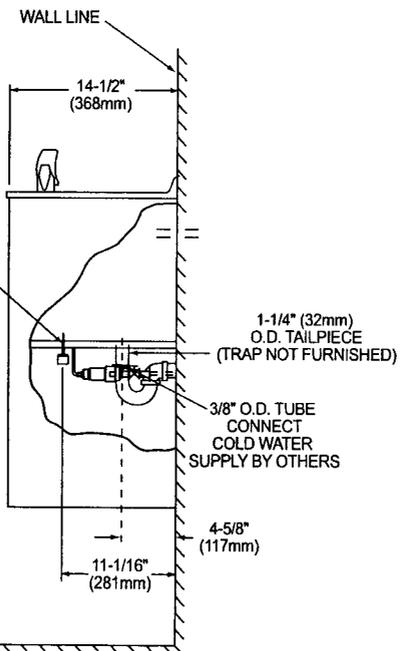

10 of 13

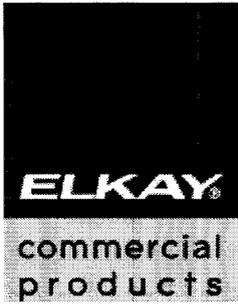

Discover the professional's choice.™

residential


commercial

where to buy

efha8

you have selected...

click on for detailed view \*

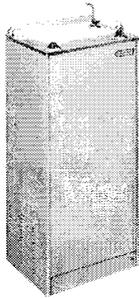

**Deluxe Floor Cooler | EFHA8L1Z**

Floor Mount  
Flow Rate: 7.6 GPH



Av  
22  
Gl  
Fo

\$1,656 - \$2,012 \*

Finish Options:



**select your features...**

Choose **at least** one or more of the features below and click **submit** to discover your ideal model.

Finish:

Power:

Wall Plate:

No

VR Bubbler:

No

Glass Filler:

Foot Pedal:

Freeze Protection:

No

Frost Resistant:

No

[news + events](#)

[faq's](#)

[experience elkay](#)

[about us](#)

[contact us](#)

[tel. 630.572.3192](#)

[privacy policy](#)


[terms of use](#)

[site map](#)

© 200

Item # 9

11 of 13

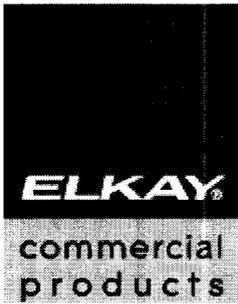

Discover the professional's choice.™

residential


commercial

where to buy

ezs8l


you have selected...

click on for detailed view \*

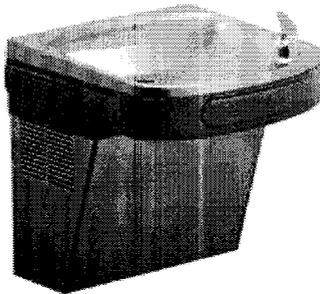

**Wall Mount ADA Cooler | EZS8L**

Wall Mount  
Flow Rate: 8 GPH



Av  
VF  
22  
Gi

\$743 - \$918 \*

Finish Options:



[Specification Sheet:](#)

**select your features...**

Choose **at least** one or more of the features below and click **submit** to discover your ideal model.

Finish:

VR Bubbler:

Freeze Protection:

No

Power:

Glass Filler:

Frost Resistant:

No

Wall Plate:

No

Foot Pedal:

No

[news + events](#)

[faq's](#)

[experience elkay](#)

[about us](#)

[contact us](#)

[tel. 630.572.3192](#)

[privacy policy](#)

[terms of use](#)

[site map](#)

© 200

# ELKAY<sup>®</sup>

## SPECIFICATIONS

### Wall Mount Water Coolers Barrier-Free Access (Adult & Child) NSF/ANSI 61 Compliant Models EZ4, EZ8, EZS4, EZS8, EZSD and EZD

#### GENERAL

Self-contained, wall hung electric refrigerated water cooler. Chilling capacity of 50°F drinking water, based upon 80°F inlet water and 90°F ambient.

**Models EZS4 and EZS8** have self-closing Easy-Touch Controls on front and both right and left sides.

**Models EZ4 and EZ8** each have self-closing Easy-Touch Controls on the front only.

**Model EZSD** is non-refrigerated. Same as EZS8 without cooling system. (Requires outlet for power cord.)

All models have a hooded stream projector with Easy-Touch Controls that require less than 3 pounds of force to activate. Patented\* valve with built-in flow regulator provide constant stream from 20 to 105 psi, water pressure. Bubbler orifice fully protected to meet all sanitary codes.

Non-pressurized stainless steel cooling tank is standard. Non-pressurized water tank is located after bubbler valve, so that tank is subject to line pressure only when Easy-Touch Control is pressed.

#### ADA COMPLIANT

These Water Coolers comply with the requirements of A.D.A. (Americans with Disabilities Act) when properly installed. Also meets the guidelines for children's environments providing the floor to orifice height is 30" or less and proper clear floor space is provided for parallel approach. (Based on Architectural and Transportation Barriers Compliance Board final ruling.) Check Local and State Codes.

#### NO LEAD DESIGN

These Water Coolers are certified to be lead-free as defined by the Safe Drinking Water Act. Elkay Water Coolers are manufactured with a waterway system utilizing copper components and completely lead-free materials. These waterways have no lead because all lead materials, such as leaded brass, have been removed. All joints are brazed using silver solder only. No lead solder is permitted. A strainer with an easily cleanable screen is provided to allow trapping and convenient removal of waterborne particulate of 140 microns and larger prior to their entry into the water cooler.

These water coolers are certified to NSF/ANSI 61.

#### CAPACITIES CHART

Model Number	Base Rate	**GPH of 50°F Drinking Water			Rated Watts	Full Load Amps	Glass† Filler Option	Ship. Wt. Lbs.
		Room Temperature °F						
		70°F	80°F	90°F				
EZS4	4.0	5.0	4.4	4.0	370	4.0	Yes	56
EZS8	8.0	9.7	8.8	8.0	370	4.0	Yes	56
EZ4	4.0	5.0	4.4	4.0	370	4.0	Yes	56
EZ8	8.0	9.7	8.8	8.0	370	4.0	Yes	56
EZSD	-	-	-	-	-	-	Yes	18
EZD	-	-	-	-	-	-	Yes	18


\*\*Based on 80°F inlet water temperature. †Glass filler available at extra cost. Requires factory preparation to receive glass filler.

Rated watts shown are based on operational (run) time, in compliance with A.R.I. Standard 1010 conditions. Specific applications will determine the actual watts consumed per hour. Watts consumed will be based on number of people served per hour (usage), ambient temperatures, and inlet water temperature.


#### COOLING SYSTEM

**Motor Compressor:** Hermetically sealed, reciprocating type, 115V, 60 Hz single phase. Sealed-in lifetime oil supply. Equipped with electric cord and three prong molded rubber plug (domestic models).

**Condenser:** Fan cooled, copper tube with aluminum fins. Fan motor is permanently lubricated.



Model EZS



Model EZ

**Cooling Unit:** Combination tube-tank type. Self cleansing. Tube portion is continuous coil of copper tubing. Tank is stainless steel. Fully insulated with EPS foam which meets Underwriters Laboratories Inc. requirements for self-extinguishing material.

**Refrigerant Control:** Refrigerant HFC-134a is controlled by accurately calibrated capillary tube for positively trouble-free operation.

**Temperature Control:** Enclosed adjustable thermostat is factory pre-set. Requires no adjustment other than for altitude requirements. Easily accessible.

#### CONSTRUCTION

**Frame:** Galvanized structural steel chassis supports refrigeration system and fastens to wall. Provides increased structural integrity and rigidity to cooler.

**Stainless Steel Basin:** One piece polished to a uniform Elkay bright luster finish. Basin has integral drain grid, embossed bubbler pad. No exposed fasteners.

**Exclusive Flexi-Guard® Safety Bubbler\*:** Innovative design utilizes an infused anti-microbial pliable polyester elastomer to prevent accidental mouth injuries. Flexes on impact, then returns to original position. Strong. Abrasion-resistant. Anti-sweat. Keyed in location to prevent rotation.

**Upper Shroud:** Contoured shock-absorbing, provides additional protection against accidental injury. No exposed fasteners.

**Lower Shroud:** One piece easy to remove and replace. Allows access to internal components from three sides.

**Cabinet:** Cabinet design allows for flush to wall mounting. No recess space is required.

**Color Selection:** Unless otherwise specified cabinet is two-tone gray on upper shroud with textured gray lower shroud. Stainless Steel lower shroud available at extra cost.

**5 YEAR LIMITED WARRANTY** on the refrigeration system of the unit. Electrical components and water system are warranted for 12 months from date of installation. Sample Certificate available on request.

Elkay Pressure-Type Water Coolers are designed to operate on 20 psi to 105 psi supply line pressure. If inlet pressure is above 105 psi, a pressure regulator must be installed in the supply line. Any damage caused by reason of connecting this product to supply line pressures lower than 20 psi or higher than 105 psi is not covered by the warranty.

#### STANDARDS



Elkay Electric Air Cooled Water Coolers meet the requirements of NSF/ANSI 61. Unit complies with A.R.I. Standard 1010.

\* Patent #4,481,971

In keeping with our policy of continuing product improvement, Elkay reserves the right to change product specifications without notice.

This specification describes an Elkay product with design, quality and functional benefits to the user. When making a comparison of other producers' offerings, be certain these features are not overlooked.

Elkay

elkayusa.com


2222 Camden Court  
Oak Brook, IL 60523

Printed in U.S.A.  
©2006 Elkay

(Rev. 9/06) 12-23C

**Wall Mount Water Coolers**  
**Barrier-Free Access (Adult & Child)**  
**NSF/ANSI 61 Compliant**  
**Models EZ4, EZ8, EZS4, EZS8, EZSD and EZD**

**ELKAY®**  
**ROUGH-IN DIMENSIONS**

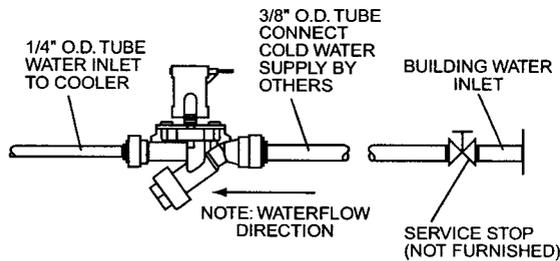

Open space rough-in design permits new installation or replacement of existing fountains and coolers with this Elkay cooler when rough-in is within the outline shown. When the cooler is mounted as shown the location available is from 15" to 21-11/16" from floor and 1-1/16" to 7-1/4" from the left of centerline. Space is also available from 21-11/16" to 24-5/8" from floor and 2-3/4" to 7-1/4" from the left of centerline. Additional space is also available from 24-5/8" to 26-11/16" from floor and 3-3/4" to 7-1/4" from the left of centerline. Connections approaching the limits of these areas may be restricted and should only be considered for use until after an examination of the cooler has been made.

**IMPORTANT!**  
**INSTALLER PLEASE NOTE:**

This water cooler has been designed and built to provide water to the user which has not been altered by materials in the cooler waterways.


The grounding of electrical equipment such as telephone, computers, etc., to water lines is a common procedure. This grounding may be in the building but may also occur away from the building. This grounding can cause electrical feedback into a water cooler creating an electrolysis which creates a metallic taste or causes an increase in the metal content of the water. This condition is avoidable by installing the cooler using the proper materials as shown below.

**NOTICE**


This water cooler must be connected to the water supply using a dielectric coupling. The cooler is furnished with a non-metallic strainer which meets this requirement.

The drain trap which is provided by the installer should also be plastic to completely isolate the cooler from the building plumbing system.

**OPERATION OF QUICK CONNECT FITTINGS**

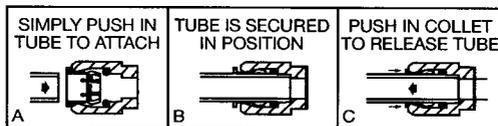

PUSHING TUBE IN BEFORE PULLING IT OUT HELPS TO RELEASE TUBE

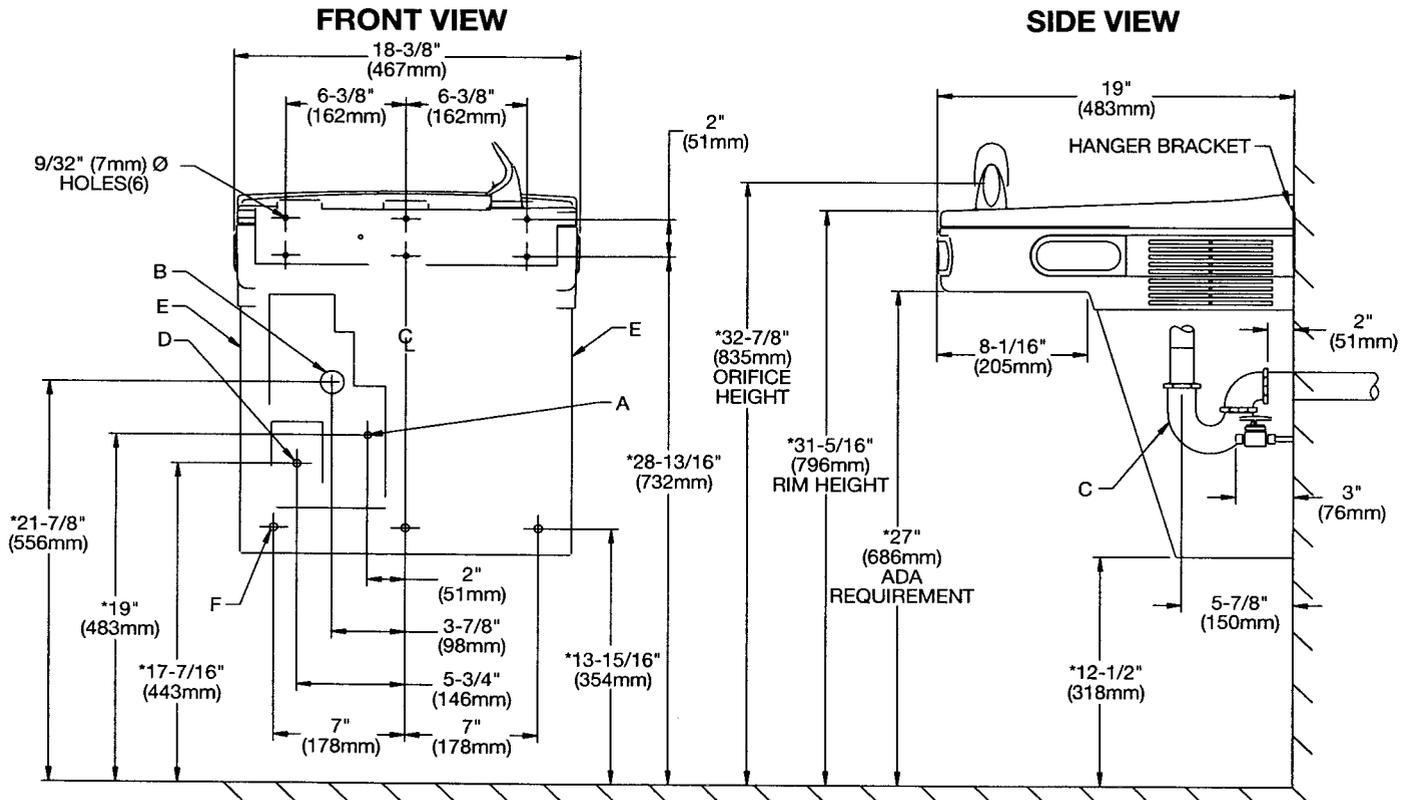

**LEGEND**

- A = RECOMMENDED WATER SUPPLY LOCATION 3/8" O.D. UNPLATED COPPER TUBE CONNECT STUB WITH SHUT OFF (BY OTHERS) 3 IN. (76mm) MAXIMUM OUT FROM WALL.
  - B = RECOMMENDED LOCATION FOR WASTE OUTLET 1-1/4" O.D. DRAIN STUB 2 IN. (51mm) OUT FROM WALL.
  - C = 1-1/4" TRAP NOT FURNISHED.
  - D = ELECTRICAL SUPPLY (3) WIRE RECESSED BOX.
  - E = INSURE PROPER VENTILATION BY MAINTAINING 6" (152mm) (MIN.) CLEARANCE FROM CABINET LOUVERS TO WALL.
  - F = 7/16" BOLT HOLES FOR FASTENING UNIT TO WALL.
- \*REDUCE HEIGHT BY 3 INCHES FOR INSTALLATION OF CHILDRENS ADA COOLER.